

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 918 041 A1

(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:

26.05.1999 Bulletin 1999/21

(21) Application number: 97934763.0

(22) Date of filing: 11.08.1997

(51) Int. Cl.⁶: C01G 53/00

(86) International application number:

PCT/JP97/02803

(87) International publication number:

WO 98/06670 (19.02.1998 Gazette 1998/07)

(84) Designated Contracting States:

DE FR GB

(30) Priority: 12.08.1996 JP 231396/96

20.12.1996 JP 355120/96

(71) Applicant:

FUJI CHEMICAL INDUSTRY CO., LTD.

Nakanikawa-gun, Toyama 930-0397 (JP)

(72) Inventors:

• MATSUBARA, Yukio

Fuji Chemical Industry Co., Ltd.

Toyama 930-03 (JP)

• UEDA, Masami

Fuji Chemical Industry Co., Ltd.

Toyama 930-03 (JP)

• INOUE, Hidetoshi

Fuji Chemical Industry Co., Ltd.

Toyama 930-03 (JP)

• FUKAMI, Tadashi

Fuji Chemical Industry Co., Ltd.

Toyama 930-03 (JP)

(74) Representative:

Welsert, Annekäte, Dipl.-Ing. Dr.-Ing.

Patentanwälte


Kraus Welsert & Partner

Thomas-Wimmer-Ring 15

80539 München (DE)

(54) LITHIUM/NICKEL/COBALT COMPOSITE OXIDE, PROCESS FOR PREPARING THE SAME, AND CATHODE ACTIVE MATERIAL FOR RECHARGEABLE BATTERY

(57) There can be provided a positive electrode active material for a secondary battery which is excellent in the charging and discharging cycle characteristics so that it retains high battery capacity that is comparable to the hitherto known LiNiO_2 even by increasing the number of cycle, which has an improved cycle property (stability) at high temperature and which is a complex oxide represented by the general formula (1)



(wherein M represents at least one element selected from the group consisting of Al, Fe, Mn and B, y represents $0.9 \leq y \leq 1.3$, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, when M is at least one element of Al, Fe and Mn, x_2 represents $0 < x_2 \leq 0.3$, when M is B, x_2 is $0 < x_2 \leq 0.1$, when M is the combination of B and at least one element of Al, Fe and Mn, x_2 represents $0 < x_2 < 0.3$ but the ratio occupied by B therein is in a range of from 0 to 0.1).

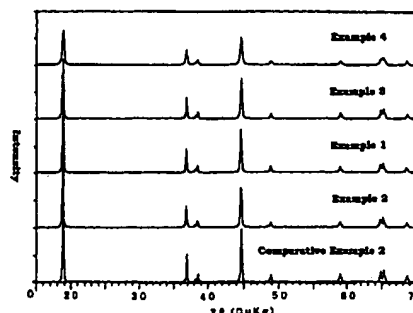


Fig. 1

EP 0 918 041 A1

Description

Technical Field

- 5 [0001] The present invention relates to a lithium nickel cobalt complex oxide having a high purity, a high crystallinity, a high battery capacity and stable structure so that the degree of decrease in the capacity is little even with increasing the number of charging and discharging cycle, to a process for preparing the same, and to a positive electrode active material for a secondary battery.

10 Background Art

[0002] As electronic appliances have been rendered small and portable in recent years, there has been increased a demand for a lithium ion secondary battery having a light weight and a high energy density in place of nickel/cadmium battery and nickel hydrogen battery.

- 15 [0003] As active materials of positive electrode for this lithium ion secondary battery, there are known LiNiO_2 and LiCoO_2 which are layered compounds capable of intercalating and deintercalating lithium ion. Of them, LiNiO_2 is being expected owing to its higher electric capacity than LiCoO_2 .

[0004] However, LiNiO_2 has not yet been put to practical use because it has problems in the charging and discharging cycle characteristics, the storage stability and the stability at a high temperature. Only LiCoO_2 has been practically

- 20 used as the positive electrode active material.

[0005] Although various attempts have been made to improve the above faults of LiNiO_2 for its utilization as the positive electrode active material for a secondary battery, there has not yet been realized one wherein all of the above faults have been solved.

- [0006] That is, in case of LiNiO_2 it is known that when much lithium ions are liberated therefrom (during charge), the structure becomes unstable owing to the two dimension structure and therefore the cycle property, storage stability and high temperature stability of the lithium ion secondary battery are bad [for example, see J. Electrochem. Soc., 140 [73] p. 1862-1870 (1993), Solid State Ionics, 69 p. 265 - 270 (1994)]. Although many attempts have been made to stabilize the structure by replacing a part of Ni by other components (Co, Mn, Fe, Ti, V etc.) for the purpose of securing the structure stability with elimination of the above faults, it was difficult to obtain highly purified and completely doped crystals as a solid solution on an industrial scale because there have been practically applied dry blending and heating processes.

- [0007] Also, an attempt has been made to control to certain specific level the physical properties such as shape and size of LiNiO_2 particles and its doped product with other components as solid solution. However, the satisfactory results could not be achieved. For example, Japanese Patent Laid-open No. 151998/1993 proposes an improvement wherein the particle size distribution is specified to such extent that 10% cumulative size is 3 ~ 15 μm , 50 % cumulative size 8 ~ 35 μm and 90 % cumulative size 30 ~ 80 μm . However, it is very difficult to adjust the particle size distribution to such extent by grinding the positive electrode active material and this is not practical process.

- [0008] Usually, LiNiO_2 has been prepared by mixing lithium components (LiOH , Li_2CO_3 , LiNO_3 etc.) with nickel components (hydroxide, carbonate etc.) in a dry state and thereafter subjecting the mixture to the reaction, and hence the heating at an elevated temperature for a long time was required. Consequently, the crystal growth proceeds but some of lithium is evaporated off and NiO as a by-product is formed, thereby the lowering of the purity is caused.

- [0009] Therefore, it was difficult to prepare highly purified product by the dry process in case that the primary particle size is small. On the other hand, in case that the primary particle size is large, a considerable lattice defect in the structure is caused and results in lowering of the purity. It was impossible to adjust crystal size to a desired, with keeping crystallinity and purity at high level by the dry process,

Disclosure of the Invention

- [0010] An object of the present invention is to provide a novel lithium nickel cobalt complex oxide which has improved properties with respect to the above faults of the hitherto known LiNiO_2 and its related complex oxide, namely which has a high purity, a high crystallinity, a high battery capacity and stable structure so that the degree of decrease in the capacity is little even by increasing the number of charging and discharging cycle.

- [0011] Another object of the present invention is to provide a process for preparing said lithium nickel cobalt complex oxide by a process via wet process which is different from the hitherto known dry process whereby the size of the formed spherical and secondary and primary particle may be set to a desired.

- [0012] A further other object of the present invention is to provide a positive electrode active material for a lithium ion secondary battery containing as an effective component said lithium nickel cobalt complex oxide.

[0013] As a result of having studied ardently to achieve the above objects, the present inventors have found that a

complex oxide which may be represented by the following general formula (I) and which may be prepared at the first time by a process via wet process described later coincides with the above objects;



(wherein M represents at least one element selected from the group consisting of Al, Fe, Mn and B, y represents $0.9 \leq y \leq 1.3$, $x_1 + x_2 = x$, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$; when M is at least one element among Al, Fe and Mn, x_2 represents $0 < x_2 \leq 0.3$, when M is B, x_2 represents $0 < x_2 < 0.1$ and when M is a combination of B and at least one element among Al, Fe and Mn, x_2 represents $0 < x_2 \leq 0.3$ wherein the proportion of B is a range of from 0 to 0.1.

[0014] The novel complex oxide of the present invention has the following features.

[0015] The first feature lies in the composition represented by the above general formula (I) based on which with holding as high battery capacity as LiNiO_2 , not only its faults i.e. cycle property (deterioration of discharge capacity caused by increasing the number of cycle) and high temperature stability may be improved but also the amount used of an expensive cobalt may be suppressed to the minimum thereby economical merit may be realized

[0016] The second feature of the complex oxide lies in that it has a high crystallinity and a high purity as identified by its X-ray diffraction pattern. That is, it is highly purified complex oxide to such extent that X-ray diffraction pattern shows that a ratio in the peak intensity of the face (003) to the face (104) i.e., (003)/(104) is 1.2 or higher and a ratio in the peak intensity of the face (006) to the face (101) i.e., (006)/(101) is 0.13 or lower, said face being defined by Miller indices hkl, the proportion of ($\text{Ni}^{3+} + \text{Co}^{3+}$) to the total (Ni + Co) being 99 % by weight or higher, a BET specific surface area being $0.1 \sim 2 \text{ m}^2/\text{g}$, an average secondary particle size D being in the range of $5 \sim 100 \mu\text{m}$ with 10 % of the particle size distribution being 0.5D or higher and 90 % 2D or lower, the surface of the spherical secondary particle being uneven as observed with a scanning electron microscope (SEM) and the primary particle constituting the spherical secondary particle being in the range of $0.2 \sim 30 \mu\text{m}$ in terms of long diameter with the average diameter of $0.3 \sim 30 \mu\text{m}$ as observed with a SEM.

[0017] In case of LiNiO_2 and its related complex oxide, when a part of the Ni is intended to be doped with other component(s) as the solid solution it is difficult to dope them homogeneously by the hitherto known dry process because the homogeneity is lowered in proportion to the amount added of other component(s) whereby not only the battery capacity is lowered but also the improvement in the cycle property, the heat resistance and the electrolytic solution resistance are insufficient.

[0018] The lithium nickel cobalt complex oxide of the present invention can be kept in high purity, in spite of being one doped with at least one element selected from the group of consisting of Al, Fe, Mn and B. As shown in Examples described later, the interlayer distance may be efficiently shortened especially by using Co together with Al and /or B whereby the structural instability of Ni by reversible deintercalation of lithium ion can be avoided. The greatest feature of the present invention is that Co and at least one element selected from the group of consisting of Al, Fe, Mn and B may be doped as solid solution in a small amount and uniformly into the lithium nickel complex oxide. Such lithium nickel cobalt complex oxide of the present invention can be obtained as the composition having a high purity and a high crystallinity by the wet process as described later.

[0019] The third feature of the complex oxide of the present invention is that there can be obtained uniform and primary particle and that shape and size of the secondary particle may be adjusted to the desired.

[0020] When an attention is paid to the size of the primary particle, in general the size of the primary particle is important for a layered compound represented by LiMO_2 in the light of the reversible deintercalation of lithium ion. Finer the primary particle, better ionic conductivity in the inside of the solid and lithium ion is more reversibly deintercalatable with the outside.

[0021] On the other hand, in considering the complex oxide from an aspect of the crystallization degree when the crystallization degree is small the crystal growth does not proceed sufficiently and the purity becomes low inevitably. Also, in case that the primary particle is small the storage stability is poor owing to moisture absorptibility and so good battery characteristics can not be achieved stably. Moreover, it is desirable that the primary particle is large taking the high temperature resistance and the reactivity with the electrolytic solution into consideration. As a result of having studied ardently, the present inventors have succeeded in the preparation of the complex oxide having an uniform primary particles of such that a long diameter of the primary particles is in the range of $0.2 \sim 30 \mu\text{m}$, preferably $1 \sim 20 \mu\text{m}$ by combined wet process-spray (or freeze) drying process-press molding and heating processes as described later.

[0022] A complex oxide wherein both the primary and secondary particles are uniform may be prepared by employing especially spray drying-heating processes. A long diameter of the primary particles is in the range of $0.2 \sim 30 \mu\text{m}$, preferably $1 \sim 20 \mu\text{m}$ and its average size is in the range of $0.3 \sim 30 \mu\text{m}$ when observed with a SEM. An average size D of the spherical secondary particle formed by spray drying-heating processes is in the range of $5 \sim 300 \mu\text{m}$, preferably $5 \sim 100 \mu\text{m}$, more preferably $5 \sim 20 \mu\text{m}$ and the particle is uniform to such extent that 10 % of the particle size distribution is 0.5D or higher and 90 % 2D or lower, and the surface of the spherical secondary particle is uneven as can be seen

under observation of a SEM.

[0023] Also, the particle ratio (a ratio of the long diameter to the short diameter) of the spherical secondary particles when observed with a SEM lies in the range of a maximum of 1.5 or less and an average of 1.2 or less with 90 % or more of them being distributed in 1.3 or less, indicating that they are uniform particles even when there was included some particles having slightly larger particle ratio than defined above in the complex oxide prepared by pulverization after the heating.

[0024] It is understood from such physical properties that not only the spherical product of the present invention, preferably one prepared by the spray drying-heating process is suitable for the closest packing density but also they have advantages when used as battery that the contact surface with each of an electrolyte and a conductive agent becomes large so that it is easy to reversibly deintercalate Li ions with the outside.

[0025] The size of the spherical secondary particles can be set to the range of from 5 μm to 100 μm as desired. However, an average size of about 5 ~ 30 μm is desirable for use as the battery material from the viewpoint of processibility. Also, the BET specific surface area lies in the range of 0.1 ~ 2 m^2/g . When it was used as the battery material, since there is no increase in the viscosity of an electrolyte the lowering in conductivity is not caused.

[0026] Also, for the purpose of setting the average long diameter of the primary particle to the range of about 1 μm ~ 30 μm it may be more simply and conveniently achieved by subjecting the spray (or freeze) dried product as above-mentioned to press molding. In case that the primary particle is large, it has physical properties that the purity and the crystallinity are high and that the high temperature stability is excellent, and therefore it may be preferably used as the positive electrode active material for a secondary battery which would be used under a severe condition. The bulk density becomes large due to press molding applied. That bulk density is high is plus for elevation of the battery capacity.

[0027] The following illustrates a process for preparing the complex oxide of the present invention which is represented by the above general formula (I) in details.

[0028] In preparing the complex oxide represented by the above general formula (I), the following processes are applied according to the three kinds of classifications that ① M is at least one element of Al, Fe and Mn, ② M is B and ③ M is the combination of B and at least one element of Al, Fe and Mn.

That is, ① in a process for preparing a complex oxide, represented by the general formula (I)



(wherein M is at least one element selected from the group consisting of Al, Fe and Mn), said complex oxide may be prepared by adding an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y to a basic metal salt represented by the general formula (II)



[wherein M represents at least one element selected from the group consisting of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 is $0 < x_1 < 0.5$, x_2 represents $0 < x_2 \leq 0.3$, $x_1 + x_2 = x$, A^{n-} represents an anion having a valence of n ($n = 1 \sim 3$) and z and m are positive numbers respectively satisfying the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] in an aqueous medium to form a slurry, spray or freeze drying the formed slurry and heating the spray or freeze dried product at a temperature of about 600°C ~ 900°C for 4 hours or more in an oxidative atmosphere.

② In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents B), said complex oxide may be prepared by adding a boron compound containing x_2 mol % of boron [x_2 represents $0 < x_2 < 0.1$, the relationship among x, x_1 and x_2 is expressed by $x_2 = x - x_1$] to a basic metal salt represented by the general formula (III)




[wherein x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, A^{n-} represents an anion having a valence of n ($n = 1 \sim 3$) and z and m represent positive numbers respectively satisfying the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] in an aqueous medium, subsequently adding thereto an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y to form a slurry, spray or freeze drying the formed slurry and heating the spray or freeze dried product at a temperature of about 600°C ~ 900°C for 4 hours or more in an oxidative atmosphere.

③ In a process for preparing a complex oxide represented by the general formula (I)



(I)

(wherein M represents the combination of B and at least one element of Al, Fe and Mn), said complex oxide may be prepared by adding a boron compound containing x_4 mol % of boron [x_4 represents $0 < x_4 < 0.1$, the relationship among x_4 , x_3 and x_2 is expressed by $x_4 + x_3 = x_2$] and an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y to a basic metal salt represented by the general formula (IV)



[wherein N represents at least one element of Al, Fe and Mn, in this case M in the general formula (I) contains both the N and B, and if the content of B therein is indicated by x_4 , x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, x_3 represents $0 < x_3 \leq 0.3 - x_4$, $x_1 + x_3 + x_4 = x$, A^{n-} represents an anion having a valence of n ($n = 1 \sim 3$), and z and m represent positive numbers respectively satisfying the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] in an aqueous medium, to form a slurry, spray or freeze drying the formed slurry and heating the spray or freeze dried product at a temperature of about $600^\circ\text{C} \sim 900^\circ\text{C}$ for 4 hours or more in an oxidative atmosphere.

[0029] As the water soluble lithium compound and the basis metal salt which may be represented by the general formulae (II), (III) or (IV) (hereinafter, referred to as "the basic metal salt" collectively), there may be employed one each containing an anion which is evaporated off during the heating.

[0030] As the examples of the lithium compound, there may be selected one or more from among LiOH, LiNO_3 , Li_2CO_3 and hydrates thereof.

[0031] As the examples of the boron compound, boric acid and lithium tetraboric acid may be preferably employed.

[0032] As the example of A^{n-} in the basic metal salt there may be selected from among the anions shown by NO_3^- , Cl^- , Br^- , CH_3COO^- , CO_3^{2-} and SO_4^{2-} .

[0033] In these compounds, LiOH as the lithium compound, boric acid as the boron compound and a basic metal salt wherein an anion is nitrate ion are used from the viewpoint of yield, reactivity, effective utilization of the resources and oxidation accelerating effect. The combination of these 3 kinds of compounds is particularly preferred from the viewpoint of battery characteristics.

[0034] As the basic metal salt which may be employed in the present invention, is preferable the basic salt having a specific composition that size of the primary particle is as fine as below $0.1 \mu\text{m}$ when measured by the Seherres method.

[0035] Also, it is preferred that this fine particle has a BET specific surface area of $10\text{m}^2/\text{g}$ or higher, preferably $40\text{m}^2/\text{g}$ or higher, more preferably $100\text{m}^2/\text{g}$ or higher. As to the BET specific surface area, if it is measured after the basic metal salt in an aqueous solution has been dried, as the very fine primary particles aggregates during dry process, then BET specific surface area of the aggregate is measured. If aggregation power is strong, nitrogen gas cannot enter into it and the value of BET specific surface area becomes small. Accordingly the basic metal salt which is practically reacted with a lithium compound in aqueous solution shows a high BET specific surface area so that the surface is highly reactive. However, BET specific surface area was set to $10\text{m}^2/\text{g}$ or higher from the above actual circumstances.

The basic metal salt having such specific composition has a layered structure, and the chemical composition and the crystal structure where M is at least one of Al, Fe and Mn are similar to those of hydroxide of $\text{Ni}_{1-x}\text{Co}_x\text{M}_2$. The chemical composition and the crystal structure where M is B are similar to those of hydroxide of $\text{Ni}_{1-x}\text{Co}_x$. And the chemical composition and the crystal structure where M is the combination of B and at least one of Al, Fe and Mn are similar to those of hydroxide of $\text{Ni}_{1-x}\text{Co}_x\text{Ni}_{x_3}$. Moreover, in all cases, the basic metal salt is microcrystalline whose surface is highly active. When it is reacted with a lithium compound such as LiOH, an extremely desirable precursor of $\text{Li}_y\text{Ni}_{1-x}\text{Co}_x\text{M}_2\text{O}_2$ is formed.

[0036] Highly purified $\text{Li}_y\text{Ni}_{1-x}\text{Co}_x\text{M}_2\text{O}_2$ having an extremely high crystallinity at which the present invention aims can be obtained only when the basic metal salt having such a specific composition is used. The hydroxides in the above is inferior in the reactivity with the lithium compound to the basic metal salt. On the other hand, when the amount of an anion in the basic metal salt is increased, the basic metal salt is deviated from the layered structure, and the anion acts inhibitory on the formation of $\text{Li}_y\text{Ni}_{1-x}\text{Co}_x\text{M}_2\text{O}_2$ during the heating, thereby the desired compound having a high purity and an extremely high crystallization degree cannot be obtained.

[0037] The basic metal salt to be used in the present invention can be prepared by adding an amount of about 0.7 ~ 0.95 equivalent, preferably about 0.8 ~ 0.95 equivalent of an alkali based on $\text{Ni}_{1-x}\text{Co}_x\text{M}_2$ salt, $\text{Ni}_{1-x}\text{Co}_x$ salt or $\text{Ni}_{1-x}\text{Co}_x\text{Ni}_{x_3}$ salt under the condition below about 80°C to effect the reaction. Examples of the alkali to be used in the reaction include alkali metal hydroxides such as sodium hydroxide, alkaline earth metal hydroxides such as calcium hydroxide, amines and the like. In this connection, it is preferable that this basic metal salt is matured at $20 \sim 70^\circ\text{C}$ for 0.1 ~ 10 hours after its preparation. Subsequently, any by-products are removed by washing with water and the lithium compound is added, and the boron compound is further added for the purpose of preparing a complex oxide containing B.

[0038] For drying the slurry obtained by such a reaction, spray or freeze drying method is desirable. The spray drying method where drying can be instantaneously accomplished and the spherical particles can be obtained is preferred from the viewpoint of the spherical granulation nature and the uniformity of the composition (in dry process requiring some drying time, lithium migrates into the surface of particles to give a non-uniform composition).

5 [0039] The heating is effected at a temperature of 600°C ~ 800°C, preferably 700°C ~ 750°C for 4 hours or higher, preferably about 4 ~ 72 hours, more preferably about 4 ~ 20 hours under an oxidative atmosphere (under the flow of oxygen). If the heating time is 72 hours or more, not only it makes cost up but also it causes evaporation of Li thereby the proportion of trivalent (Ni + Co) to the total (Ni + Co) becomes rather low and the purity becomes bad.

[0040] In the known technique by the drying process regarding the heating, the heating of at least 20 hours was
10 required for Ni which is hard to convert into trivalent from divalent. In the light of the fact, the process of the present invention which may be carried out even at shorter heating time than 20 hours is very economical and advantageous.

[0041] The second process is press molding process which is advantageous for the purpose of making the primary particle large and further making the bulk density high.

[0042] The dry product obtained by the spray drying or freeze drying process above-mentioned is press molded and
15 then heated, whereby not only the size of the primary particle may be optionally set within the range of 1 ~ 30 µm, but also there can be obtained the complex oxide having high bulk density, degree of crystallization and purity.

[0043] The spherical particle that is the spray dried product is excellent powder with respect to flowability, molding and filling properties, and is a good material to be pressed into a shape as it is according to the conventional manner.

[0044] Although the pressure for molding may be varied depending on the pressing machine to be applied and the
20 amount to be fed and is not limited particularly, usually about 500 ~ 3,000 kg/cm² is suitable.

[0045] Pressing machine to be applied is not limited particularly and it may be one capable of pressing. However, tablet compressing machine, briquette, roller compactor may be suitably employed.

[0046] The density of the press molded product may be about 1 ~ 4g/cc, preferably about 2 ~ 3g/cc.

[0047] The press molding is very useful in that moving distance among molecules becomes short and crystal growth
25 during the heating is accelerated. Accordingly, it is not always necessary that the material to be subjected to the press molding is spray dried spherical particle product. The freeze dried product may also be used.

[0048] This press molded product can be heated as it is. The heating is effected at a temperature of usually 600~900°C, preferably 700°C ~ 800°C for a period of 4 hours or higher, preferably 10 ~ 72 hours under an atmosphere of oxygen.

30 [0049] The longer the heating time, the larger the size of the primary particle. Therefore, the heating time is determined depending on the desired size of the primary particle.

[0050] For accomplishing the heating in a short time, 2 times heating of pre-heating and after-heating may be applied. The slurry obtained by the process described previously is spray - or freeze-dried and the spray - or freeze-dried product is first pre-heated at a temperature of about 600 °C ~ 900°C for 0.5 hour or more (preferably 0.5 ~ 4 hours) under
35 an oxidative atmosphere, the obtained pre-heating product is pulverized if necessary and pressed into a shape, and then after-heated at a temperature of about 600°C ~ 900°C for 1 hour or more (preferably 4 ~ 48 hours) under an oxidative atmosphere. The total time required for the heating may be shortened by employing this process.

[0051] The thus obtained complex oxide of the present invention which may be represented by the general formula (I) retains high battery capacity of 160~ 180 mAh/g even after 100 charging and discharging cycles and has an
40 improved high temperature cycle property (stability) as is apparent from the Examples described later, and hence it may be effectively utilized as a positive electrode active material for a secondary battery.

Brief Description of the Drawings

45 [0052]

Fig. 1 is powder X-ray diffraction patterns of the complex oxides obtained in Examples 1 ~ 4 and Comparative Examples 1 ~ 2, respectively.

Fig. 2 is SEM photograph (x 1,500 magnifications) indicating the primary particles of the complex oxide obtained
50 in Example 1.

Fig. 3 is SEM photograph (x 1,500 magnifications) indicating the primary particles of the complex oxide obtained in Example 4.

Fig. 4 is powder X-ray diffraction pattern of the complex oxide obtained in Example 5.

Fig. 5 is powder X-ray diffraction pattern of the complex oxide obtained in Example 6.

55 Fig. 6 is powder X-ray diffraction pattern of the complex oxide obtained in Example 7.

Fig. 7 is SEM photograph (x 30,000) of the complex oxide obtained in Example 5.

Fig. 8 is SEM photograph (x 3,000 magnifications) indicating the primary particles of the complex oxide obtained in Example 6.

Fig. 9 is SEM photograph ($\times 10,000$ magnifications) indicating the primary particles of the complex oxide obtained in Example 7.

Fig. 10 is powder X-ray diffraction pattern of the complex oxide obtained in Example 8.

Fig. 11 is powder X-ray diffraction pattern of the complex oxide obtained in Example 9.

5 Fig. 12 is powder X-ray diffraction pattern of the complex oxide obtained in Example 10.

Fig. 13 is powder X-ray diffraction pattern of the complex oxide obtained in Example 11.

Fig. 14 is SEM photograph ($\times 1,500$ magnifications) indicating the primary particles of the complex oxide obtained in Example 8.

10 Fig. 15 is SEM photograph ($\times 1,500$ magnifications) indicating the primary particles of the complex oxide obtained in Example 10.

Fig. 16 is SEM photograph ($\times 1,500$ magnifications) indicating the primary particles of the complex oxide obtained in Example 11.

Best Modes for Carrying Out the Invention

15

[0053] The present invention is more specifically illustrated by the following examples.

Example 1

20 [0054] There was prepared a mixed aqueous solution of 2.0 M nickel nitrate and cobalt nitrate wherein the molar ratio of Ni : Co was 80 : 19. This mixed aqueous solution and 1.0 M aqueous sodium hydroxide solution were added to a reaction vessel under stirring using quantitative pumps while the amount added of aqueous sodium hydroxide solution was adjusted so as to maintain pH 8.0 at a reaction temperature of 25°C, thereby the continuous reaction was carried out. The residence time of average 10 minutes was taken.

25 [0055] The reaction product overflowed from the reaction vessel during the continuous reaction was collected in the receiver tank. The reaction was completed when the necessary amount of the reaction product was collected.

[0056] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.8}\text{Co}_{0.19}(\text{OH})_{1.833}(\text{NO}_3)_{0.147} \cdot 0.16\text{H}_2\text{O}$) and suspended in water. And then, boric acid was added to the suspension in an amount such that the molar ratio of Ni : Co : B became 80 : 19 : 1 with respect to the Ni and Co contents in the suspension. To the resultant slurry 3.0 M aqueous lithium hydroxide solution was added dropwisely in an amount such that the molar ratio of $\text{Li}/(\text{Ni} + \text{Co} + \text{B})$ became 1.05.

30 [0057] Thereafter, the reaction mixture was spray-dried. The obtained dry gel was put in an alumina boat and heated at 750°C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company).

35 [0058] The chemical composition of the heating product was $\text{LiNi}_{0.80}\text{Co}_{0.19}\text{B}_{0.01}\text{O}_2$.

Example 2

40 [0059] There was prepared a mixed aqueous solution of 2.0 M nickel nitrate and cobalt nitrate wherein the molar ratio of Ni : Co was 80 : 19.5. This mixed aqueous solution and 1.0 M aqueous sodium hydroxide solution were simultaneously added so as to maintain pH 8.0 according to similar manner as in Example 1, whereupon the continuous reaction was conducted at 25°C for 10 minutes of the resident time.

45 [0060] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.8}\text{Co}_{0.195}(\text{OH})_{1.86}(\text{NO}_3)_{0.130} \cdot 0.22\text{H}_2\text{O}$) and suspended in water. And then, boric acid was added to the suspension in such amount that the molar ratio of Ni : Co : B became 80 : 19.5 : 0.5 with respect to the Ni and Co contents in the suspension. To the resultant slurry 3.0 M aqueous lithium hydroxide solution was added dropwisely in an amount such that the molar ratio of $\text{Li}/(\text{Ni} + \text{Co} + \text{B})$ became 1.05. Thereafter, the reaction mixture was spray dried. The obtained dry gel was put in an alumina boat and heated at 750 °C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company).

50 [0061] The chemical composition of the heating product was $\text{LiNi}_{0.80}\text{Co}_{0.195}\text{B}_{0.005}\text{O}_2$.

Example 3

55 [0062] There was prepared a mixed aqueous solution of 2.0 M nickel nitrate and cobalt nitrate wherein the molar ratio of Ni : Co was 80 : 18. This mixed aqueous solution and 1.0 M aqueous sodium hydroxide solution were simultaneously added so as to maintain pH 8.0 according to similar manner as in Example 1, whereupon the continuous reaction was conducted at 25°C for 10 minutes of the resident time.

[0063] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its

composition was $\text{Ni}_{0.8}\text{Co}_{0.18}(\text{OH})_{1.79}(\text{NO}_3)_{0.17} \cdot 0.3\text{H}_2\text{O}$ and suspended in water. And then, boric acid was added to the suspension in such amount that the molar ratio of Ni : Co : B became 80 : 18 : 2 with respect to the Ni and Co contents in the suspension. To the resultant slurry 3.0 M aqueous lithium hydroxide solution was added dropwisely in an amount such that the molar ratio of Li/(Ni + Co + B) became 1.05. Thereafter, the reaction mixture was spray dried. The obtained dry gel was put in an alumina boat and heated at 750 °C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company).

[0064] The chemical composition of the heating product was $\text{LiNi}_{0.80}\text{Co}_{0.18}\text{B}_{0.02}\text{O}_2$.

Example 4

[0065] There was prepared a mixed aqueous solution of 2.0 M nickel nitrate and cobalt nitrate wherein the molar ratio of Ni : Co was 80 : 15. This mixed aqueous solution and 1.0 M aqueous sodium hydroxide solution were simultaneously added so as to maintain pH 8.0 according to similar manner as in Example 1, whereupon the continuous reaction was conducted at 25°C for 10 minutes of the resident time.

[0066] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.8}\text{Co}_{0.15}(\text{OH})_{1.76}(\text{NO}_3)_{0.14} \cdot 0.25\text{H}_2\text{O}$) and suspended in water. And then, boric acid was added to the suspension in such amount that the molar ratio of Ni : Co : B became 80 : 15 : 5 with respect to the Ni and Co contents in the suspension. To the resultant slurry 3.0 M aqueous lithium hydroxide solution was added dropwisely in an amount such that the molar ratio of Li/(Ni + Co + B) became 1.05. Thereafter, the reaction mixture was spray dried. The obtained dry gel was put in an alumina boat and heated at 750 °C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company).

[0067] The chemical composition of the heating product was $\text{LiNi}_{0.80}\text{Co}_{0.15}\text{B}_{0.50}\text{O}_2$.

Comparative Example 1

[0068] There was prepared a mixed aqueous solution of 2.0 M nickel nitrate and cobalt nitrate wherein the molar ratio of Ni : Co was 80 : 10. This mixed aqueous solution and 1.0 M aqueous sodium hydroxide solution were simultaneously added so as to maintain pH 8.0 according to similar manner as in Example 1, whereupon the continuous reaction was conducted at 25°C for 10 minutes of the resident time.

[0069] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.8}\text{Co}_{0.01}(\text{OH})_{1.68}(\text{NO}_3)_{0.12} \cdot 0.19\text{H}_2\text{O}$) and suspended in water. And then, boric acid was added to the suspension in such amount that the molar ratio of Ni : Co : B became 80 : 10 : 10 with respect to the Ni and Co contents in the suspension. To the resultant slurry 3.0 M aqueous lithium hydroxide solution was added dropwisely in an amount such that the molar ratio of Li/(Ni + Co + B) became 1.05. Thereafter, the reaction mixture was spray dried. The obtained dry gel was put in an alumina boat and heated at 750°C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company).

[0070] The chemical composition of the heating product was $\text{LiNi}_{0.80}\text{Co}_{0.10}\text{B}_{0.10}\text{O}_2$.

Comparative Example 2

[0071] There was prepared a mixed aqueous solution of 2.0 M nickel nitrate and cobalt nitrate wherein the molar ratio of Ni : Co was 80 : 20. This mixed aqueous solution and 1.0 M aqueous sodium hydroxide solution were simultaneously added so as to maintain pH 8.0 according to similar manner as in Example 1, whereupon the continuous reaction was conducted at 25°C for 10 minutes of the resident time.

[0072] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.8}\text{Co}_{0.2}(\text{OH})_{1.87}(\text{NO}_3)_{0.13} \cdot 0.14\text{H}_2\text{O}$) and suspended in water. And then, 3.0 M aqueous lithium hydroxide solution was added dropwisely to the suspension in an amount such that the molar ratio of Li/(Ni + Co) became 1.05. Thereafter, the reaction mixture was spray dried. The obtained dry gel was put in an alumina boat and heated at 750°C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company).

[0073] The chemical composition of the firing product was $\text{LiNi}_{0.80}\text{Co}_{0.20}\text{O}_2$.

Comparative Example 3 (dry process corresponding to Example 1)

[0074] 1.00 Mol lithium hydroxide, 0.80 mol nickel hydroxide, 0.19 mol cobalt hydroxide and 0.01 mol boric acid were sufficiently mixed in dry state and pulverized in a mortar, and then pelletized into size of 14 mm of a diameter x 2 mm of a thickness. The resultant pellets were heated at 750 °C for 48 hours in an atmosphere of oxygen.

[0075] The chemical composition of the heat - treated product was $\text{LiNi}_{0.80}\text{Co}_{0.19}\text{B}_{0.01}\text{O}_2$.

[0076] The respective powder X-ray diffraction patterns of the complex oxides obtained Examples 1 ~ 4 and Comparative Examples 1 ~ 2 are shown in Fig. 1. As is apparent from Fig. 1, any peak based on by-product was not recognized in each process and the complex oxides are estimated to have uniformly doped layered structure.

[0077] The respective SEM photographs ($\times 1,500$ magnifications) indicating the primary particles of the complex oxides obtained in Examples 1 and 4 are shown in Figs. 2 and 3. The scale unit of - line shown in the lower part of the respective photographs indicates 10 μm .

[0078] Also, the respective crystalline sizes estimated from the X-ray diffraction measured with respect to the basic metal salts obtained by the continuous reaction in Examples 1 ~ 4 stated above and Examples 5 ~ 12 described later are summarized in table 1. It can be seen from table 1 that the crystalline size is below 0.1 μ in all cases, indicating that there was formed the basic metal salt having fine primary particle.

Table 1

Crystalline Size of Basic Metal Salt Obtained by the Continuous Reaction	
No.	Crystalline Size (ang- strom)
Example 1	38.1
Example 2	42.5
Example 3	34.6
Example 4	45.1
Example 5	37.9
Example 6	46.2
Example 7	37.4
Example 8	38.1
Example 9	35.3
Example 10	40.5
Example 11	43.5
Example 12	41.4

[0079] Furthermore, the ratio of the trivalence in (Ni + Co) and the physical properties such as BET specific surface area, the peak intensity ratios (003)/(104) and (006)/(101) estimated by powder X-ray diffraction, an average secondary particle size measured by laser microtrack and long diameter of the primary particle obtained from observation of the SEM photograph, each measured with respect to these complex oxides are shown in table 2.

[0080] The trivalent (Ni + Co) ratio and the BET specific surface area were measured according to Experimental Examples 2 and 3, respectively.

Table 2

No.	Ratio of the Trivalence in (Ni+ Co) (%)	BET m^2/g	Ratio of (003)/(104)	Ratio of (006)/(101)	Average Sec- ondary Parti- cle Size (μm)	Average Long Diameter of Primary Parti- cle (μm)
Example 1	99.8	0.1	1.310	0.101	15.21	0.72
Example 2	99.7	0.2	1.304	0.102	17.21	0.65
Example 3	99.9	0.1	1.273	0.111	18.01	0.62
Example 4	99.1	0.1	1.211	0.106	16.42	0.68

EP 0 918 041 A1

Table 2 (continued)

No.	Ratio of the Trivalence in (Ni+ Co) (%)	BET m ² /g	Ratio of (003)/(104)	Ratio of (006)/(101)	Average Secondary Particle Size (μm)	Average Long Diameter of Primary Particle (μm)
Comparative Example 1	89.5	0.2	0.873	0.268	17.21	0.61
Comparative Example 2	99.6	0.1	1.245	0.104	18.21	0.67

[0081] From the results shown in table 2, in case that M in the general formula (I) is B, the complex oxide of Comparative Example 1 wherein the amount added (content) of B is 10 mol % has low trivalent ratio. The peak intensity ratio of (003)/(104) obtained by the powder X - ray diffraction is lower than 1.2 while that of (006)/(101) is higher than 0.13 and thus the crystallinity is low. For these facts, in case that M in the general formula (I) is B, it is more preferable that the numerical value of x_2 is $0 < x_2 \leq 0.05$.

[0082] With respect to other physical properties, the complex oxides in the above Examples and Comparative Examples 1 ~ 2 have the similar physical properties each other because all of them were prepared by wet - spray drying process.

[0083] Moreover, table 3 shows the results of the battery test (charge and discharge test) conducted according to Experimental Example 4 using the respective complex oxides of Examples 1 ~ 4 and Comparative Examples 1 ~ 2 to evaluate initial discharge capacity (mAh/g), discharge capacity at 100th cycle (mAh/g) and decrease rate of discharge capacity at 100th cycle (%). In comparison with the complex oxide of Comparative Example 3 prepared by dry process, the complex oxides of Examples 1 ~ 4 were recognized to have the improved cycle characteristics and initial discharge capacity.

Table 3

No.	Initial Discharge Capacity (mAh/g)	Discharge Capacity at 100th Cycle (mAh/g)	Decrease Rate of Discharge Capacity at 100th Cycle (%)
Example 1	187	182	2.7
Example 2	185	174	5.9
Example 3	184	178	3.3
Example 4	178	167	6.2
Comparative Example 1	152	89	41.4
Comparative Example 2	184	171	9.3
Comparative Example 3	163	112	31.2

[0084] It can be seen from table 3 that the complex oxides of Examples 1 ~ 4, each containing boron have improved cycle characteristics in comparison with the complex oxide of Comparative Example 2 containing no boron, and especially the complex oxides of Examples 1 ~ 3 wherein the content of boron is in the range of 0.05 ~ 2 mol% have further improved initial discharge capacity.

Example 5

[0085] There was prepared a mixed aqueous solution of 2.0 mol/l nickel nitrate, cobalt nitrate and aluminum nitrate wherein the molar ratio of Ni : Co : Al was 8 : 1 : 1. This mixed aqueous solution and 1.0 mol/l aqueous sodium hydroxide solution were continuously added under the condition of the reaction pH of 8.0, the reaction temperature of 25°C and vigorous stirring.

[0086] The obtained reaction mixture was filtered, washed with water and suspended in water thereby obtaining a $\text{Ni}_{0.80}\text{Co}_{0.10}\text{Al}_{0.10}(\text{OH})_{1.7}(\text{NO}_3)_{0.40}$ slurry. A 3.0 mol/l aqueous lithium hydroxide solution was added dropwisely to the obtained slurry in an amount such that the atomic ratio of Li/(Ni + Co + Al) was 1.05 with respect to the (Ni + Co + Al)

EP 0 918 041 A1

content in the above slurry to effect reaction. Thereafter, the reaction mixture was spray dried. The obtained dry gel was put in an alumina boat and heated at 750 °C for 10 hours in an atmosphere of oxygen in a tube furnace, and pulverized in a mortar to obtain powdery $\text{LiNi}_{0.797}\text{Co}_{0.101}\text{Al}_{0.102}\text{O}_2$.

5 Example 6

[0087] There was prepared a mixed aqueous solution of 2.0 mol/l nickel nitrate, cobalt nitrate and aluminum nitrate wherein the molar ratio of Ni : Co : Al was 16 : 3 : 1. This mixed aqueous solution and 1.0 mol/l aqueous sodium hydroxide solution were continuously added under the condition of the reaction pH of 8.0, the reaction temperature of 25°C and vigorous stirring.

[0088] The obtained reaction mixture was filtered, washed with water and suspended in water thereby obtaining a $\text{Ni}_{0.80}\text{Co}_{0.15}\text{Al}_{0.05}(\text{OH})_{1.7}(\text{NO}_3)_{0.35}$ slurry. A 3.0 mol/l aqueous lithium hydroxide solution was added dropwisely to the obtained slurry in an amount such that the atomic ratio of Li/(Ni + Co + Al) was 1.05 with respect to the (Ni + Co + Al) content in the above slurry to effect reaction. Thereafter, the reaction mixture was spray dried. The obtained dry gel was pressed into a pellet having $\varnothing 14$ and a thickness of 2 mm under pressure of 2 t/cm² using a static compressor. The pellet was put in an alumina boat and heated at 750 °C for 48 hours in an atmosphere of oxygen in a tube furnace, and pulverized in a mortar to obtain powdery $\text{LiNi}_{0.785}\text{Co}_{0.161}\text{Al}_{0.054}\text{O}_2$.

Example 7

[0089] There was prepared a mixed aqueous solution of 2.0 mol/l nickel nitrate, cobalt nitrate and aluminum nitrate wherein the molar ratio of Ni : Co : Al was 16 : 3 : 1. This mixed aqueous solution and 1.0 mol/l aqueous sodium hydroxide solution were continuously added under the condition of the reaction pH of 8.0, the reaction temperature of 25°C and vigorous stirring.

[0090] The obtained reaction mixture was filtered, washed with water and suspended in water thereby obtaining a $\text{Ni}_{0.80}\text{Co}_{0.15}\text{Al}_{0.05}(\text{OH})_{1.7}(\text{NO}_3)_{0.35}$ slurry. A 3.0 mol/l aqueous lithium hydroxide solution was added dropwisely to the obtained slurry in an amount such that the atomic ratio of Li/(Ni + Co + Al) was 1.05 with respect to the (Ni + Co + Al) content in the above slurry to effect reaction. Thereafter, the reaction mixture was freeze dried. The obtained dry gel was pressed into a pellet having $\varnothing 14$ and a thickness of 2 mm under pressure of 2 t/cm² using a static compressor. The pellet was put in an alumina boat and heated at 750 °C for 48 hours in an atmosphere of oxygen in a tube furnace, and pulverized in a mortar to obtain powdery $\text{LiNi}_{0.798}\text{Co}_{0.151}\text{Al}_{0.051}\text{O}_2$.

[0091] The respective powder X - ray diffraction patterns of the complex oxides obtained in Examples 5, 6 and 7 are shown in Figs. 4, 5 and 6. As is apparent from them, any peak based on by-product was not recognized in each process and the complex oxides are estimated to have uniformly doped layered structure.

[0092] Furthermore, the ratio of the trivalence in (Ni + Co) and the physical properties such as BET specific surface area, the peak intensity ratios (003)/(104) and (006)/(101) obtained by powder X - ray diffraction and the bulk density, each measured with respect to these complex oxides are shown in table 4. A SEM photograph ($\times 30,000$ magnifications) indicating the primary particles of the complex oxide of Example 5 is shown in Fig. 7, that ($\times 30,000$ magnifications) indicating the primary particles of the complex oxide of Example 6 in Fig. 8 and that ($\times 10,000$ magnifications) indicating the primary particles of the complex oxide of Example 7 in Fig. 9. The scale unit of - line shown in the lower part of the respective photographs indicates 1 μm .

[0093] The trivalent (Ni + Co) ratio and the BET specific surface area were measured according to Experimental Examples 2 and 3, respectively.

Table 4

No.	Ratio of the Trivalence in (Ni+ Co) (%)	BET m ² /g	Ratio of (003)/(104)	Ratio of (006)/(101)	Bulk Density Particle Size (g/m ³)
Example 5	100	0.43	1.466	0.115	1.75
Example 6	99.7	0.68	1.557	0.111	2.24
Example 7	99.2	0.61	1.351	0.119	2.21

[0094] As is apparent from table 4, the trivalent (Ni + Co) ratio is approximately 100% and the peak intensity ratio of (003)/(104) obtained by the powder X-ray diffraction is lower than 1.2 while that of (006)/(101) is higher than 0.13 and thus the degree of crystallization is exceedingly high.

[0095] Furthermore, it can be seen from the SEM photographs that the primary particle grew to a great extent and

EP 0 918 041 A1

the bulk density became sufficiently high in case of the complex oxides of Examples 6 and 7 each subjected to press molding.

Example 8

[0096] There was prepared a mixed aqueous solution of 2.0 mol/l nickel nitrate, cobalt nitrate and aluminum nitrate wherein the molar ratio of Ni : Co : Al was 790 : 165 : 25. This mixed aqueous solution and 1.0 mol/l aqueous sodium hydroxide solution were simultaneously added at 25°C under vigorous stirring so as to keep pH to 10.0 thereby effecting the continuous reaction.

[0097] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.79}\text{Co}_{0.165}\text{Al}_{0.025}(\text{OH})_{1.845}(\text{NO}_3)_{0.14} \cdot 0.2\text{H}_2\text{O}$) and suspended in water. Thereafter, boric acid was added to the suspension in an amount such that the molar ratio of Ni : Co : Al : B became 790 : 165 : 25 : 20 with respect to the Ni, Co and Al contents in the suspension. To the resultant slurry was added dropwisely a 3.0 M aqueous lithium hydroxide solution in an amount such that the atomic ratio of Li/(Ni + Co + Al + B) was 1.05. Thereafter, the reaction mixture was spray - dried. The obtained dry gel was put in an alumina boat and heated at 750 °C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company) , and then pulverized in a mortar to obtain powdery $\text{LiNi}_{0.790}\text{Co}_{0.165}\text{Al}_{0.025}\text{B}_{0.020}\text{O}_2$.

Example 9

[0098] There was prepared a mixed aqueous solution of 2.0 mol/l nickel nitrate, cobalt nitrate and aluminum nitrate wherein the molar ratio of Ni : Co : Al was 790 : 140 : 50. This mixed aqueous solution and 1.0 mol/l aqueous sodium hydroxide solution were simultaneously added so as to keep pH to 9.75 at 25 °C under vigorous stirring, thereby effecting the continuous reaction.

[0099] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.79}\text{Co}_{0.14}\text{Al}_{0.05}(\text{OH})_{1.86}(\text{NO}_3)_{0.15} \cdot 0.24\text{H}_2\text{O}$) and suspended in water. Thereafter, boric acid was added to the suspension in an amount such that the molar ratio of Ni : Co : Al : B became 790 : 140 : 50 : 20 with respect to the Ni, Co and Al contents in the suspension. To the resultant slurry was added dropwisely a 3.0 M aqueous lithium hydroxide solution in an amount such that the atomic ratio of Li/(Ni + Co + Al + B) was 1.05. Thereafter, the reaction mixture was spray - dried. The obtained dry gel was put in an alumina boat and heated at 775 °C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company) , and then pulverized in a mortar to obtain powdery $\text{LiNi}_{0.790}\text{Co}_{0.140}\text{Al}_{0.050}\text{B}_{0.020}\text{O}_2$.

Example 10

[0100] There was prepared a mixed aqueous solution of 2.0 mol/l nickel nitrate, cobalt nitrate and aluminum nitrate wherein the molar ratio of Ni : Co : Al was 790 : 90 : 100. This mixed aqueous solution and 1.0 mol/l aqueous sodium hydroxide solution were simultaneously added so as to keep pH to 9.5 at 25°C under vigorous stirring thereby effecting the continuous reaction.

[0101] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.79}\text{Co}_{0.09}\text{Al}_{0.10}(\text{OH})_{1.92}(\text{NO}_3)_{0.14} \cdot 0.18\text{H}_2\text{O}$) and suspended in water. Thereafter, boric acid was added to the suspension in an amount such that the molar ratio of Ni : Co : Al : B became 790 : 90 : 100 : 20 with respect to the Ni, Co and Al contents in the suspension. To the resultant slurry was added dropwisely a 3.0 M aqueous lithium hydroxide solution in an amount such that the atomic ratio of Li/(Ni + Co + Al + B) was 1.05. Thereafter, the reaction mixture was spray - dried. The obtained dry gel was put in an alumina boat and heated at 775 °C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company) , and then pulverized in a mortar to obtain powdery $\text{LiNi}_{0.790}\text{Co}_{0.090}\text{Al}_{0.100}\text{B}_{0.020}\text{O}_2$.

Example 11

[0102] There was prepared a mixed aqueous solution of 2.0 mol/l nickel nitrate, cobalt nitrate, aluminum nitrate and ferric nitrate wherein the molar ratio of Ni : Co : Al : Fe was 800 : 100 : 50 : 50. This mixed aqueous solution and 1.0 mol/l aqueous sodium hydroxide solution were simultaneously added so as to keep pH to 9.5 at 25°C under vigorous stirring thereby effecting the continuous reaction.

[0103] The obtained reaction product was filtered, washed with water (the portion was dried after washing and its composition was $\text{Ni}_{0.8}\text{Co}_{0.01}\text{Al}_{0.05}\text{Fe}_{0.05}(\text{OH})_{1.96}(\text{NO}_3)_{0.14} \cdot 0.18\text{H}_2\text{O}$) and suspended in water to form a slurry. To the resultant slurry was added dropwisely a 3.0 M aqueous lithium hydroxide solution in an amount such that the atomic ratio of Li/(Ni + Co + Al + Fe) was 1.05. Thereafter, the reaction mixture was spray - dried. The obtained dry gel was put

in an alumina boat and heated at 725°C for 15 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company), and then pulverized in a mortar to obtain powdery $\text{LiNi}_{0.800}\text{Co}_{0.100}\text{Al}_{0.050}\text{Fe}_{0.050}\text{O}_2$.

5 Example 12

[0104] There was prepared a mixed aqueous solution of 2.0 mol/l nickel nitrate, cobalt nitrate and manganese nitrate wherein the molar ratio of Ni : Co : Mn was 800 : 150 : 50. This mixed aqueous solution and 1.0 mol/l aqueous sodium hydroxide solution were simultaneously added so as to keep pH to 9.0 at 25 °C under vigorous stirring thereby effecting the continuous reaction.

[0105] The obtained reaction product was filtered, washed with water and suspended in water to form a slurry. To the resultant slurry was added dropwisely a 3.0 M aqueous lithium hydroxide solution in an amount such that the atomic ratio of Li/(Ni + Co + Mn) was 1.05. Thereafter, the reaction mixture was spray - dried. The obtained dry gel was put in an alumina boat and heated at 750°C for 10 hours in an atmosphere of oxygen in a tube furnace (TF-630 type, a product of Yamada Electric Company), and then pulverized in a mortar to obtain powdery $\text{LiNi}_{0.800}\text{Co}_{0.150}\text{Mn}_{0.050}\text{O}_2$.

Comparative Example 4 (dry process corresponding to Example 5)

[0106] 1.00 Mol lithium hydroxide, 0.80 mol nickel hydroxide, 0.10 mol cobalt hydroxide and 0.01 mol aluminum hydroxide were sufficiently mixed in dry state and pulverized in a mortar, and then pelletized into size of 14 mm of a diameter x 2 mm of a thickness. The resultant pellets were heated at 750°C for 48 hours in an atmosphere of oxygen.

[0107] The chemical composition of the heating product was $\text{LiNi}_{0.80}\text{Co}_{0.10}\text{Al}_{0.10}\text{O}_2$.

Comparative Example 5 (dry process corresponding to Example 8)

[0108] 1.00 Mol lithium hydroxide, 0.79 mol nickel hydroxide, 0.165 mol cobalt hydroxide, 0.025 mol aluminum hydroxide and 0.02 mol boric acid were sufficiently mixed in dry state and pulverized in a mortar, and then pelletized into size of 14 mm of a diameter x 2 mm of a thickness. The resultant pellets were heated at 750 °C for 48 hours in an atmosphere of oxygen.

[0109] The chemical composition of the heating product was $\text{LiNi}_{0.79}\text{Co}_{0.165}\text{Al}_{0.025}\text{B}_{0.02}\text{O}_2$.

[0110] The powder X-ray diffraction patterns of the complex oxides obtained in Examples 8 ~ 11 are shown in Figs. 10 ~ 13, respectively. As is apparent from them, any peak based on by - product was not recognized in each process and the complex oxides are estimated to have uniformly doped layered structure.

[0111] Furthermore, the trivalent (Ni + Co) ratio and the physical properties such as BET specific surface area, the peak intensity ratios (003)/(104) and (006)/(101) obtained by powder X - ray diffraction, each measured with respect to these complex oxides are shown in table 5. A SEM photograph (x 1,500 magnifications) indicating the primary particles of the complex oxide of Example 8 is shown in Fig. 14, that (x 1,500 magnifications) indicating the primary particles of the complex oxide of Example 10 is shown in Fig. 15 and that (x 1,500 magnifications) indicating the primary particles of the complex oxide of Example 11 is shown in Fig. 16. The scale unit of - line shown in the lower part of the respective photographs indicates 10 μm .

[0112] The trivalent (Ni + Co) ratio and the BET specific surface area were measured according to Experimental Examples 2 and 3, respectively.

Table 5

No.	Ratio of the Trivalence in (Ni + Co) (%)	BET m^2/g	Ratio of (003)/(104)	Ratio of (006)/(101)
Example 8	100.0	0.44	1.330	0.105
Example 9	100.0	0.62	1.236	0.102
Example 10	99.8	0.57	1.311	0.114
Example 11	99.9	0.69	1.334	0.099

[0113] As is apparent from table 5, each of the complex oxides of the above Examples has the physical property satisfying sufficiently the range defined in the appended claims.

[0114] Moreover, table 6 shows the results of the battery test (charge and discharge test) conducted according to

EP 0 918 041 A1

Experimental Example 4 using the respective complex oxides of Examples 5 ~ 11 and Comparative Examples 4~ 5 to evaluate initial discharge capacity (mAh/g), discharge capacity at 100th cycle (mAh/g) and decrease rate of discharge capacity at 100th cycle (%).

5

Table 6

10

15

20

No.	Initial Discharge Capacity (mAh/g)	Discharge Capacity at 100th Cycle (mAh/g)	Decrease Rate of Discharge Capacity at 100th Cycle (%)
Example 5	173	161	7.2
Example 6	176	165	6.4
Example 7	176	165	6.0
Example 8	185	177	4.3
Example 9	186	180	3.2
Example 10	176	169	4.2
Example 11	159	147	7.6
Comparative Example 4	148	111	24.7
Comparative Example 5	139	98	29.6

25 [0115] It is recognized from table 6 that the lithium nickel cobalt complex oxides have a tendency to decrease the initial discharge capacity with the increase in the Al content therein and correspondingly with decrease in the Co content as compared with the complex oxide of the Comparative Example 3 shown in table 3, and that the improvement in the cycle characteristics may be achieved by the addition of boron. Furthermore, it is understood that the addition of Fe shows a great tendency to decrease the initial discharge capacity as compared with the case of Al addition. However, the complex oxide of the present invention is superior in the initial capacity and the cycle characteristics to those of the Comparative Examples 4 and 5.

30 [0116] It can be seen from the above results that although the addition of Al has a significance in respect of making the amount used of the expensive Co decreased, it causes minus effect in the battery performance. However, the positive electrode employed hitherto as the material for lithium ionic secondary battery have a problem of the thermal stability. On the other hand, the complex oxides obtained by the present invention cause a good improvement effect with respect to the thermal stability.

35 [0117] As an index for the thermal stability of the positive electrode material, there is a means wherein differential thermal analysis is conducted with respect to the positive electrode material placed in charged state and the exothermic temperature at which oxygen evolution occurs is measured. Then, the test results of the thermal stability test carried out according to Experimental Example 5 with respect to the complex oxides obtained by the present invention are shown in table 7.

45

50

55

Table 7

No.	Exothermic Peak Temperature at which Oxygen Evolution Occurs(°C)
Example 1	215
Example 2	212
Example 3	218
Example 4	220
Example 5	236
Example 6	253

Table 7 (continued)

No.	Exothermic Peak Temperature at which Oxygen Evolution Occurs(°C)
Example 7	253
Example 8	252
Example 9	249
Example 10	236
Comparative Example 2	198

[0118] It can be seen from table 7 that the introduction of Al into the lithium nickel cobalt complex oxide causes the elevation in the exothermic temperature at which oxygen evolution occurs in comparison with the complex oxide of Comparative Example 2, and further large primary particle as in Examples 6 and 7 causes the elevation in the exothermic temperature similarly so that the thermal stability can be improved.

[0119] As stated above, the lithium nickel cobalt complex oxide of the present invention, especially one doped completely with Al and/or B as the solid liquid is satisfactory secondary battery positive electrode material as the battery performance.

Experimental Example 1

Scherrer's method:

[0120] It is a method wherein the size of crystallite is calculated by the following equation (1) on the assumption that the width of diffraction pattern is dependent on the size of crystallite alone owing to uniformity in the size of crystallite and no strain in the crystals.

$$D_{hkl} = (k\lambda) / (\beta \cos \theta) \quad (\text{Equation 1})$$

wherein D_{hkl} (angstrom) represents size of crystallite in vertical direction to the face (hkl), λ (angstrom) the wave length of X-ray, β (rad) the width of diffraction pattern, θ (°) angle of diffraction, and k a constant.

Experimental Example 2

A method for measuring trivalent (Ni + Co):

[0121] The trivalent (Ni + Co) ratio is value expressed in percentage the ratio of the trivalent (Ni + Co) to the total (Ni + Co), and is measured by oxidation-reduction titration. 0.2 Gram of a sample was dissolved in 0.25M $\text{FeSO}_4 \cdot 3.6\text{N}$ H_2SO_4 solution, and 2 ml of a concentrated phosphoric acid was added to the solution. The mixture was titrated with a 0.1N KMnO_4 solution. Blank test was carried out in the same manner as in the above. The trivalent (Ni + Co) % was calculated by the following equation. In the equation, f represents the factor of the 0.1 N KMnO_4 solution, X_0 the titer of the blank test (ml), X the titer of the sample (ml), m the amount of the sample (g), A the content of Ni (%) and B the content of Co (%)

$$\text{The trivalent (Ni + Co) ratio (\%)} \text{ in the sample} = 10f (X_0 - X)/m (A/5.871 + B/5.893)$$

Experimental Example 3

A method for measuring BET specific surface area:

[0122] The sample was degassed by heating under the flow of a mixed gas of 30 % nitrogen and 70 % helium, and thereafter specific surface area was measured according to the BET one point continuous flowing method using "MONOSORB" (a product of Yuasa Ionics Co., Ltd.).

Experimental Example 4

A battery test method

5 [0123] The lithium nickel complex oxide, acetylene black as a conductive agent and tetrafluoroethylene as a binder were mixed in a ratio of 88 : 6.0 : 6.0 % by weight. Thereafter, the mixture was subjected to compression molding on stainless steel mesh, thereby obtaining pellets each having a diameter of 18 mm. The resultant pellets were dried at 200 °C for 2 hours, and used as a positive electrode material.

10 [0124] As a negative electrode material was used a rolled lithium metal sheet pressed-bonded to a stainless substrate. As a diaphragm, porous membrane made of polypropylene ("Cell Guard 2502") and a glass filter-paper filter were used. There was used an electrolyte in which 1M LiClO₄ was dissolved in an ethylene carbonate/dimethylmethoxyethane mixture (1:1 weight ratio). The procedures up to completion from setup of a test cell (semi-open type cell) were conducted in an argon replaced dry box. The charging and discharging for this lithium battery were performed under a voltage control between 3.0 V and 4.3 V at a constant current density of 0.4 mA/cm².

15

Experimental Example 5

A thermal stability test method:

20 [0125] A cell was prepared by a similar manner as in Experimental Example 3 and charging was conducted under the constant current density of 0.4 mA/cm² until it reached 4.4 V. After the completion of charging, the cell was decomposed to take out the positive electrode. The positive electrode was washed with the electrolyte solution and dried under vacuum. The dried positive electrode was subjected to a differential thermal analysis apparatus under flow of nitrogen at a heating rate of 2°C/min. to examine the exothermic peak temperature at which oxygen evolution occurs.

25

Industrial Applicability:

[0126] As explained above, according to the present invention there can be provided a novel complex oxide which may be represented by the general formula (I)

30



and which is a positive electrode active material for a secondary battery which is excellent in the charging and discharging cycle characteristics so that it retains high battery capacity that is comparable to the hitherto known LiNiO₂ even by increasing the number of cycle and which has an improved cycle property (stability) at high temperature.


35

[0127] Also, since the amount used of the expensive Co can be suppressed to the minimum by introducing further the metal represented by M, it is advantageous from the viewpoint of cost.

Claims

40

1. A complex oxide represented by the general formula (I)



45

(wherein M represents at least one element selected from the group consisting of Al, Fe, Mn and B, y represents $0.9 \leq y \leq 1.3$, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, when M is at least one element selected from the group consisting of Al, Fe and Mn, x_2 represents $0 < x_2 \leq 0.3$, when M is B, x_2 is $0 < x_2 < 0.1$, when M is the combination of B and at least one element of Al, Fe and Mn, x_2 represents $0 < x_2 < 0.3$ but the ratio occupied by B therein is in a range of from 0 to 0.1).

50

2. A complex oxide represented by the general formula, (I)



55

(wherein M represents at least one element selected from the group consisting of Al, Fe, Mn and B, y represents $0.9 \leq y \leq 1.3$, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, when M is at least one element selected from the group consisting of Al, Fe and Mn, x_2 represents $0 < x_2 \leq 0.3$, when M is B, x_2 is $0 < x_2 < 0.1$, when M is the combination of B and at least one element of Al, Fe and Mn, x_2 represents $0 < x_2 < 0.3$ but the ratio

occupied by B therein is in a range of from 0 to 0.1), whose X-ray diffraction pattern shows that the ratio in the peak intensity of the face (003) to the face (104) i.e. (003)/(104) is higher than 1.2 and the ratio in the peak intensity of the face (006) to the face (101) i.e. (006)/(101) is below 0.13, said face being defined by Miller indices hkl, the proportion of trivalent (Ni + Co) to the total (Ni + Co) being 99 % by weight or higher, BET specific surface area being 0.1 ~ 2 m²/g, an average secondary particle size D being in the range of 5 ~ 100 μm with 10 % of the particle size distribution being 0.5D or more and 90 % 2D or less, and the surface of the spherical secondary particle being uneven as observed with a scanning electron microscope (SEM) and primary particle constituting the spherical secondary particle being in the range of 0.2 ~ 30 μm in terms of long diameter with its average size of 0.3 ~ 30 μm as observed with the SEM.

3. A complex oxide represented by the general formula (I)



(wherein M represents at least one element selected from the group consisting of Al, Fe, Mn and B, y represents $0.9 \leq y \leq 1.3$, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, when M is at least one element selected from the group consisting of Al, Fe and Mn, x_2 represents $0 < x_2 \leq 0.3$, when M is B, x_2 is $0 < x_2 < 0.1$, when M is the combination of B and at least one element of Al, Fe and Mn, x_2 represents $0 < x_2 < 0.3$ but the ratio occupied by B therein is in a range of from 0 to 0.1), whose X-ray diffraction pattern shows that the ratio in the peak intensity of the face (003) to the face (104) i.e. (003)/(104) is higher than 1.2 and the ratio in the peak intensity of the face (006) to the face (101) i.e. (006)/(101) is below 0.13, said face being defined by Miller indices hkl, and which has 99 % by weight or higher in the proportion of trivalent (Ni + Co) to the total (Ni + Co), a BET specific surface area of 0.1 ~ 2 m²/g and an average long diameter of the primary particle of 0.3 ~ 30 μm as observed with the SEM.


4. The complex oxide as claimed in claims 1 ~ 3 wherein said M is at least one selected from the group consisting of Al and B.

5. In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents at least one element selected from the group consisting of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.5$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

adding to a basic metal salt having the general formula (II)



[wherein M represents at least one element selected from the group consisting of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, x_2 represents $0 < x_2 \leq 0.3$, $x_1 + x_2 = x$, Aⁿ⁻ represents an anion having a valence of n (n = 1 ~ 3), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry, spray or freeze drying the formed slurry and heating the spray - or freeze-dried product at a temperature of about 600°C ~ 900°C for about 4 hours or more in an oxidative atmosphere.

6. In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents B, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.1$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

first adding to a basic metal salt having the general formula (III)

EP 0 918 041 A1




[wherein x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, A^n represents an anion having a valence of n ($n = 1 \sim 3$), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] a boron compound containing x_2 mole % ($0 < x_2 < \text{HS1530} > 0.1$, the relationship among x, x_1 and x_2 is expressed in $x_2 = x - x_1$) in an aqueous medium, and then adding an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry, spray or freeze drying the formed slurry and heating the spray - or freeze-dried product at a temperature of about $600^\circ\text{C} \sim 900^\circ\text{C}$ for about 4 hours or more in an oxidative atmosphere.

7. In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents the combination of B and at least one element of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.5$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

adding to a basic metal salt having the general formula (IV)



[wherein N represents at least one element of Al, Fe and Mn in this connection M in the general formula (I) contains B and N, the content of B therein is expressed by x_4 , x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, x_3 represents $0 < x_3 \leq 0.3$, $x_1 + x_3 + x_4 = x$, A^n represents an anion having a valence of n ($n = 1 \sim 3$), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] a boron compound containing x_4 mole % ($0 < x_4 < 0.1$, the relationship among x_4 , x_3 and x_2 is expressed in $x_4 + x_3 = x_2$) and an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry, spray or freeze drying the formed slurry and heating the spray - or freeze-dried product at a temperature of about $600^\circ\text{C} \sim 900^\circ\text{C}$ for about 4 hours or more in an oxidative atmosphere.

8. In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents at least one element selected from the group consisting of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.5$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

adding to a basic metal salt having the general formula (II)



[wherein M represents at least one element selected from the group consisting of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, x_2 represents $0 < x_2 \leq 0.3$, $x_1 + x_2 = x$, A^n represents an anion having a valence of n ($n = 1 \sim 3$), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry, spray or freeze drying the formed slurry, subjecting the resultant dried material to press molding and heating the press molded product at a temperature of about $600^\circ\text{C} \sim 900^\circ\text{C}$ for about 4 hours or more in an oxidative atmosphere.

9. In a process for preparing a complex oxide represented by the general formula (I)

EP 0 918 041 A1



(wherein M represents B, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.1$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

first adding to a basic metal salt having the general formula (III)



[wherein x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, A^n represents an anion having a valence of n ($n = 1 \sim 3$), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] a boron compound containing x_2 mole % ($0 < x_2 < \text{HS1530} > 0.1$, the relationship among x, x_1 and x_2 is expressed in $x_2 = x - x_1$) in water medium, and then adding an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry, spray or freeze drying the formed slurry, subjecting the resultant dried material to press molding and heating the press molded product at a temperature of about $600^\circ\text{C} \sim 900^\circ\text{C}$ for about 4 hours or more in an oxidative atmosphere.

10. In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents the combination of B and at least one element of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.5$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

adding to a basic metal salt having the general formula (IV)



[wherein N represents at least one element of Al, Fe and Mn in this connection M in the general formula (I) contains B and N, the content of B therein is expressed by x_4 , x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, x_3 represents $0 < x_3 \leq 0.3$, x_4 , $x_1 + x_3 + x_4 = x$, A^n represents an anion having a valence of n ($n = 1 \sim 3$), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] a boron compound containing x_4 mole % ($0 < x_4 < 0.1$, the relationship among x_4 , x_3 and x_2 is expressed in $x_4 + x_3 = x_2$) and an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry, spray or freeze drying the formed slurry, subjecting the resultant dried material to press molding and heating the press molded product at a temperature of about $600^\circ\text{C} \sim 900^\circ\text{C}$ for about 4 hours or more in an oxidative atmosphere.

11. In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents at least one element selected from the group consisting of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.5$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

adding to a basic metal salt having the general formula (II)



[wherein M represents at least one element selected from the group consisting of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, x_2 represents $0 < x_2 \leq 0.3$, $x_1 + x_2 = x$, A^n represents an anion having

EP 0 918 041 A1

a valence of n ($n = 1 \sim 3$), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry,

spray or freeze drying the formed slurry,

pre-heating the resultant dried material at a temperature of about $600^{\circ}\text{C} \sim 900^{\circ}\text{C}$ for about 0.5 hour or more,

subjecting the resultant pre-heating product to press molding and

heating the press molded product at a temperature of about $600^{\circ}\text{C} \sim 900^{\circ}\text{C}$ for about 1 hour or more in an oxidative atmosphere.

12. In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents B, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.1$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

first adding to a basic metal salt having the general formula (III)



[wherein x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, A^n represents an anion having a valence of n ($n = 1 \sim 3$), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] a boron compound containing x_2 mole % ($0 < x_2 < 0.1$, the relationship among x , x_1 and x_2 is expressed in $x_2 = x - x_1$) in an aqueous medium, and

then adding an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry,

spray or freeze drying the formed slurry,

pre-heating the resultant dried material at a temperature of about $600^{\circ}\text{C} \sim 900^{\circ}\text{C}$ for about 0.5 hour or more,

subjecting the resultant pre-heating product to press molding and

heating the press molded product at a temperature of about $600^{\circ}\text{C} \sim 900^{\circ}\text{C}$ for about 1 hour or more in an oxidative atmosphere.

13. In a process for preparing a complex oxide represented by the general formula (I)



(wherein M represents the combination of B and at least one element of Al, Fe and Mn, x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, $x_1 + x_2 = x$, x_2 represents $0 < x_2 < 0.5$ and y represents $0.9 \leq y \leq 1.3$), the process characterized by

adding to a basic metal salt having the general formula (IV)



[wherein N represents at least one element of Al, Fe and Mn in this connection M in the general formula (I) contains B and N, the content of B therein is expressed by x_4 , x represents $0 < x \leq 0.5$, x_1 represents $0 < x_1 < 0.5$, x_3 represents $0 < x_3 \leq 0.3 - x_4$, $x_1 + x_3 + x_4 = x$, A^n represents an anion having a valence of n ($n = 1 \sim 3$), z and m positive numbers satisfying respectively the ranges of $0.03 \leq z \leq 0.3$, $0 \leq m < 2$] a boron compound containing x_4 mole % ($0 < x_4 < 0.1$, the relationship among x_4 , x_3 and x_2 is expressed in $x_4 + x_3 = x_2$) and an amount of a lithium compound corresponding to the number of atomic moles of Li indicated by y in an aqueous medium to form a slurry,

spray or freeze drying the formed slurry,

pre-heating the resultant dried material at a temperature of about $600^{\circ}\text{C} \sim 900^{\circ}\text{C}$ for about 0.5 hour or more,

subjecting the resultant pre-heating product to press molding and

heating the press molded product at a temperature of about $600^{\circ}\text{C} \sim 900^{\circ}\text{C}$ for about 1 hour or more in an oxidative atmosphere.

14. A positive electrode active material for a secondary battery which contains as an effective ingredient the complex

EP 0 918 041 A1

oxide as claimed in claim 1, 2, 3 or 4.

5

10

15

20

25

30

35

40

45

50

55

Fig. 1

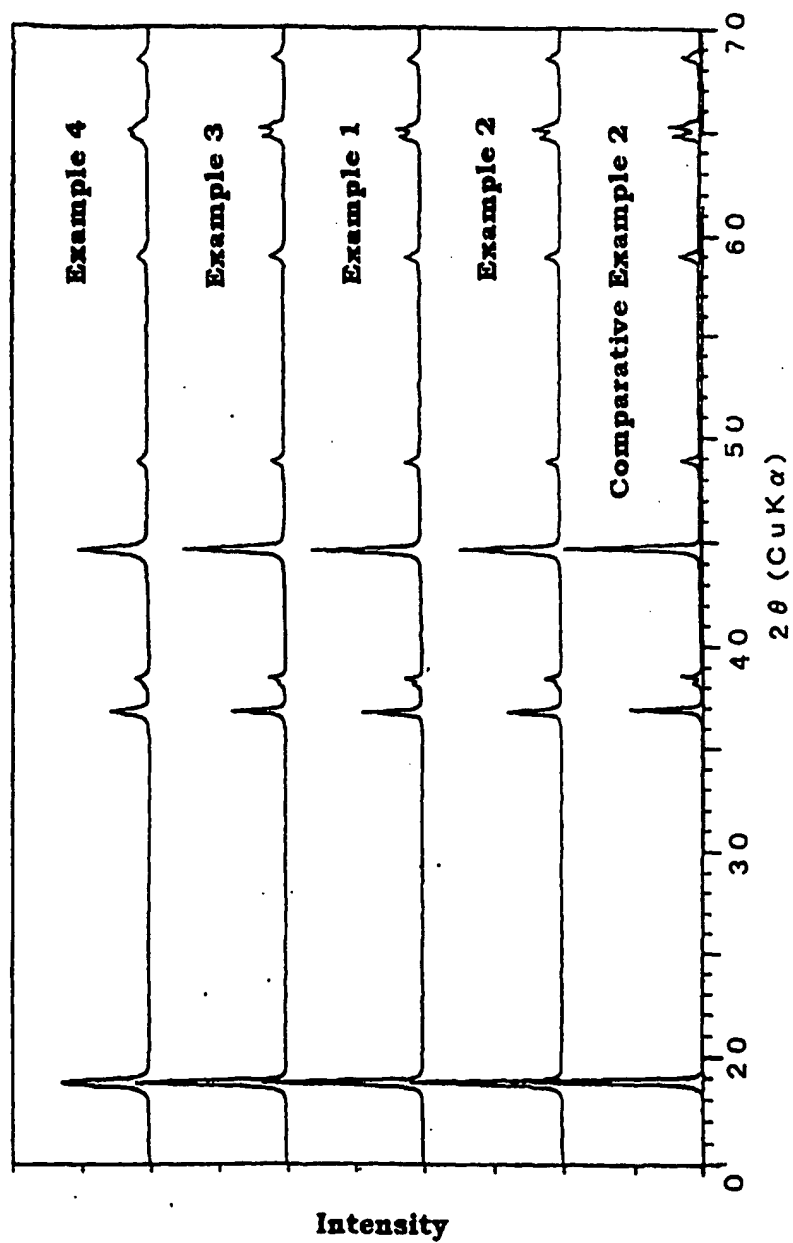


Fig. 2



Fig. 3

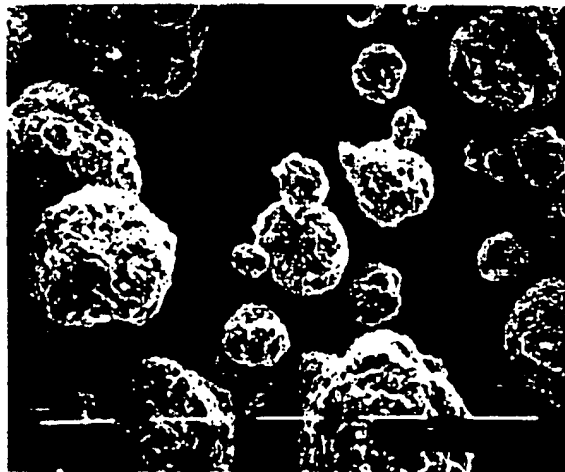


Fig. 4

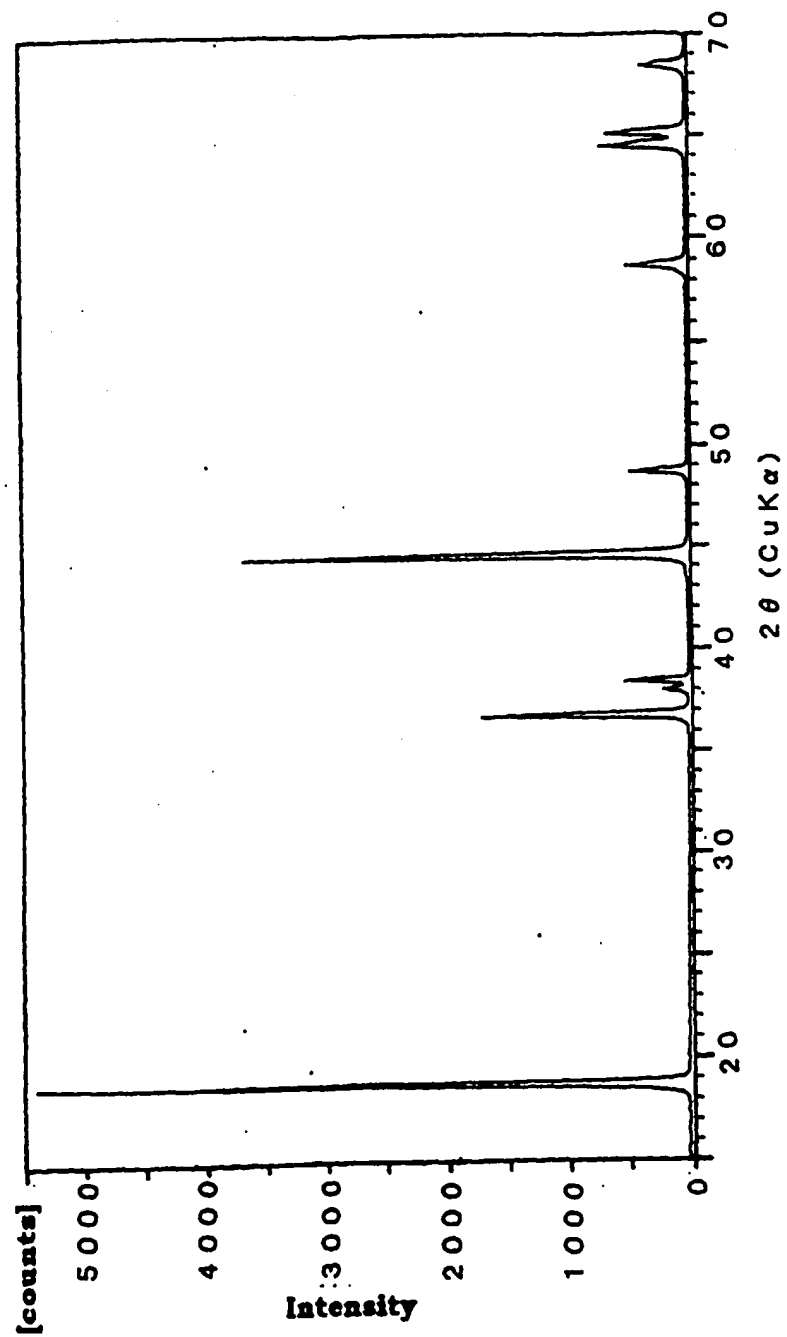


Fig. 5

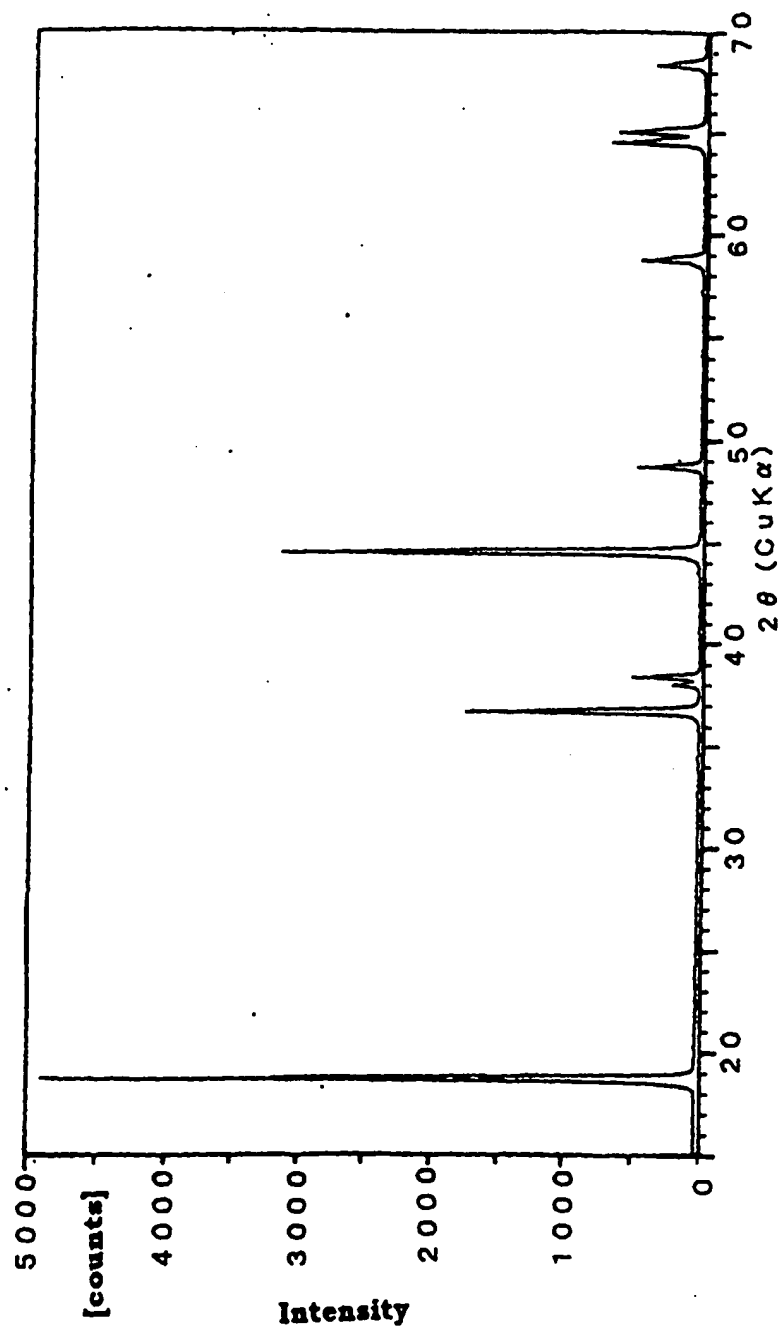


Fig. 6

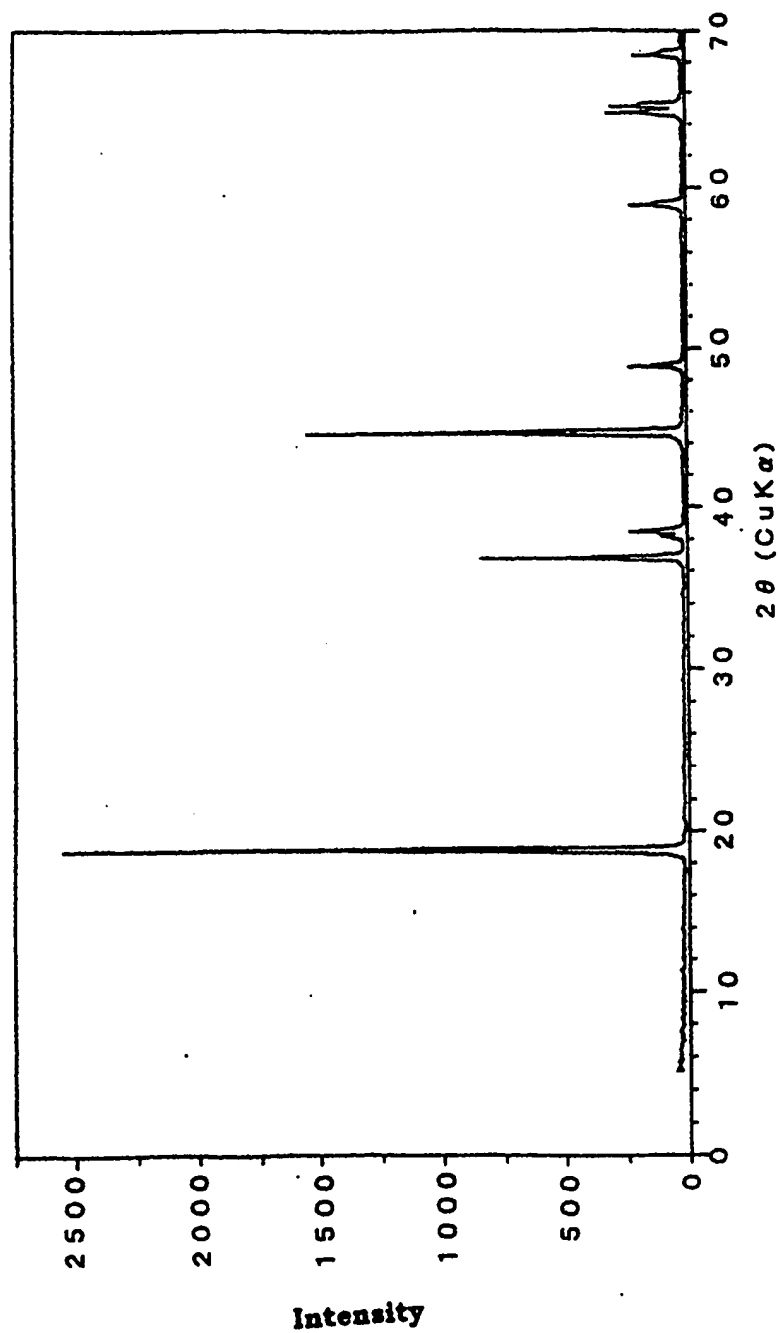


Fig. 7



Fig. 8

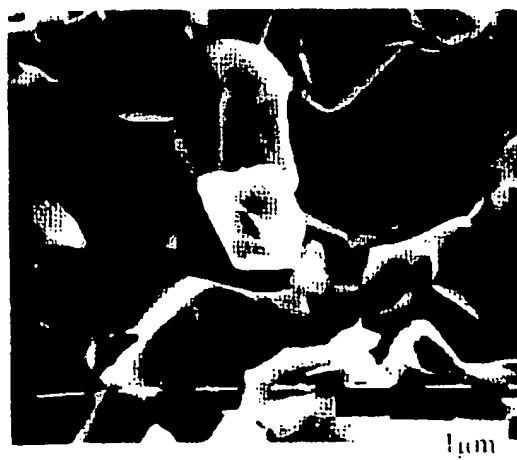


Fig. 9



Fig. 10

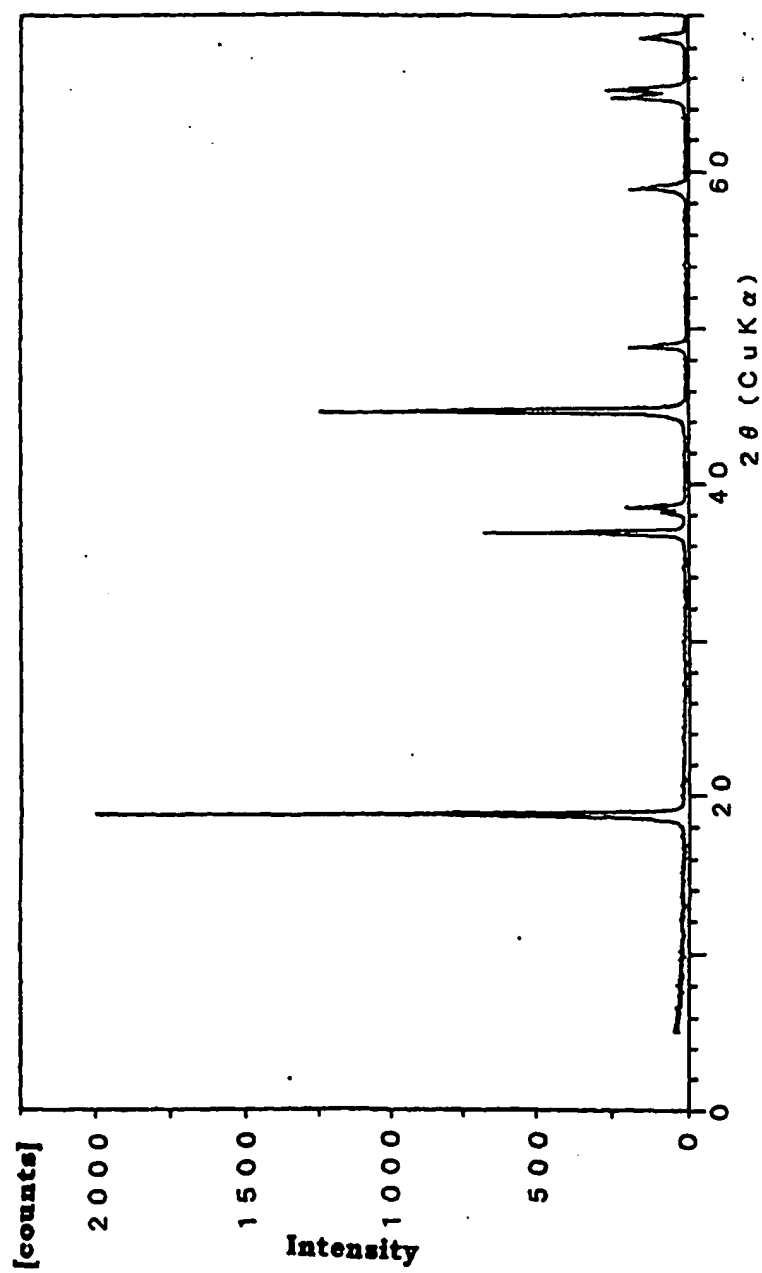


Fig. 11

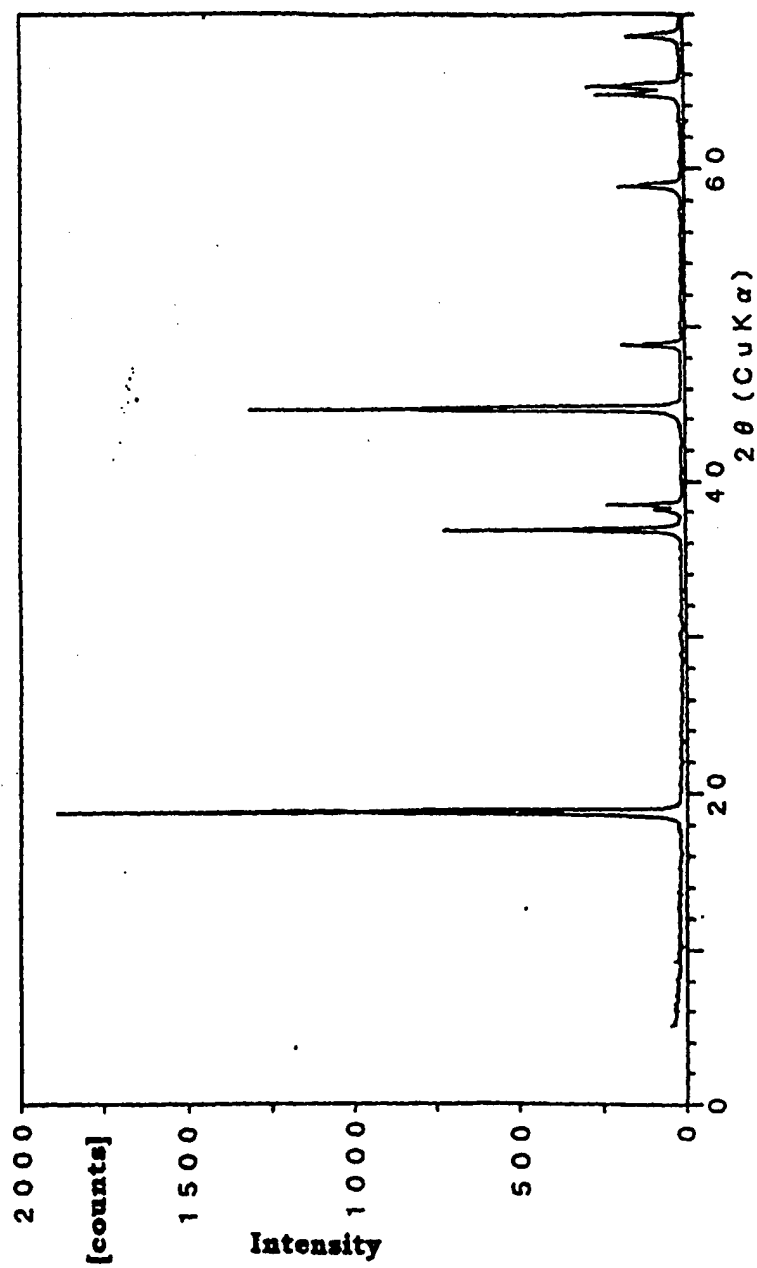


Fig. 12

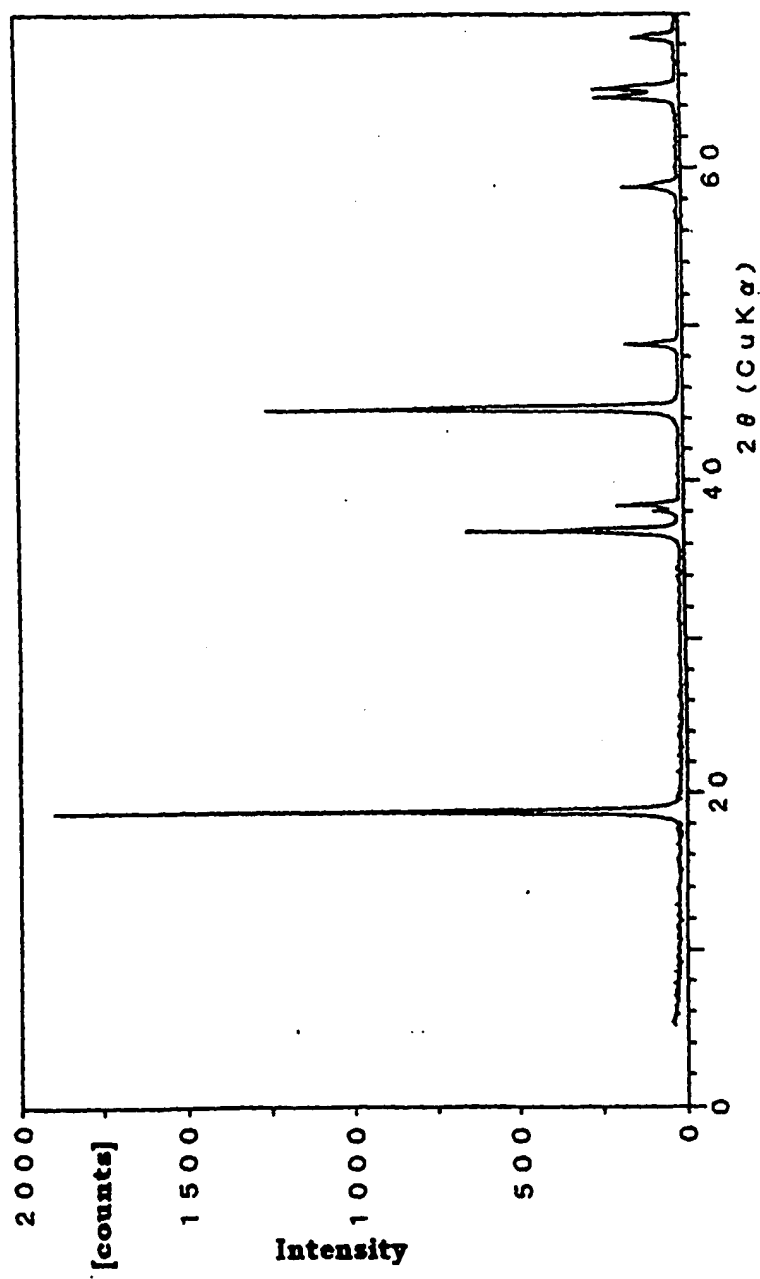


Fig. 13

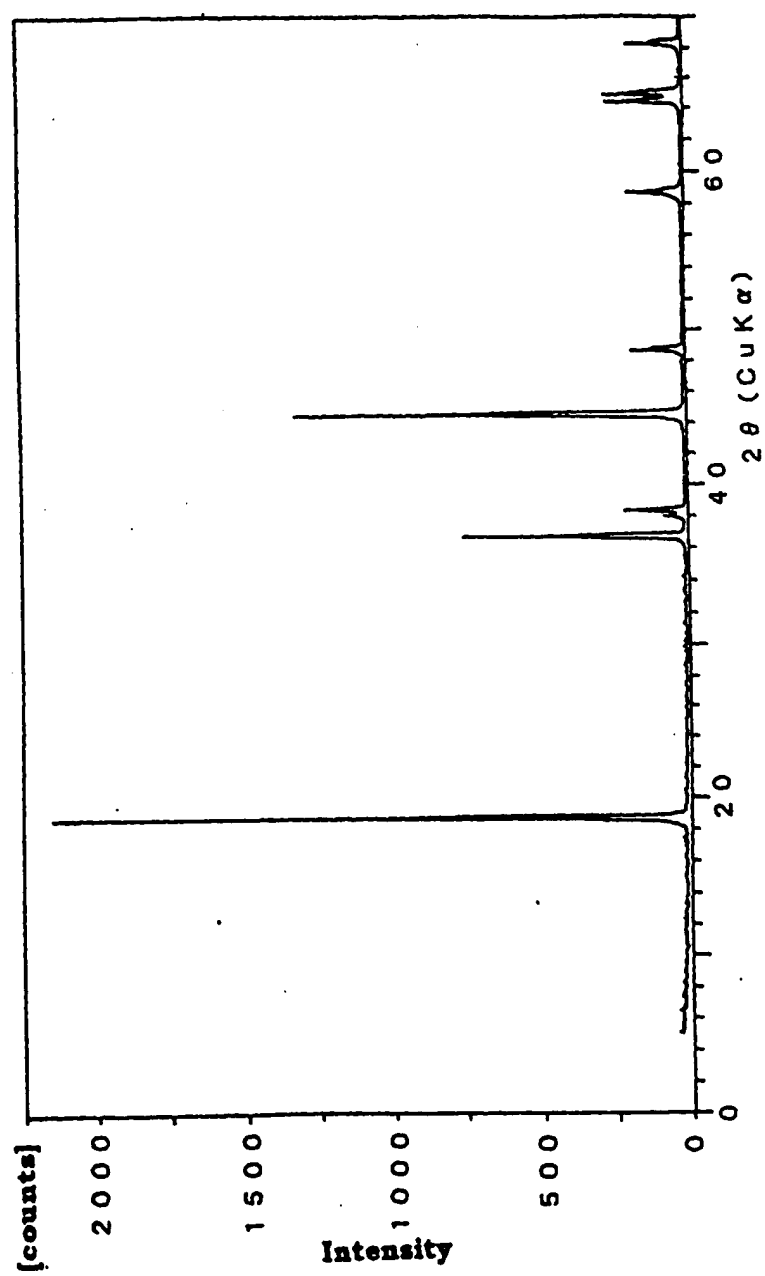


Fig. 14

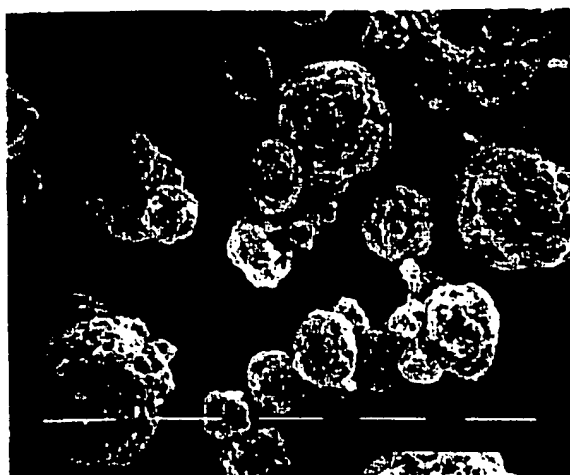


Fig. 15


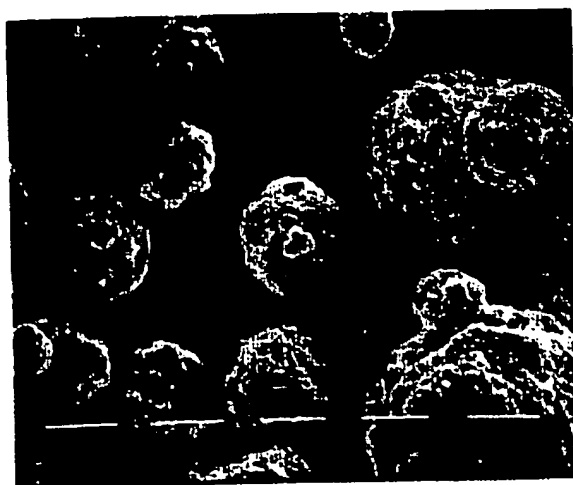


Fig. 16

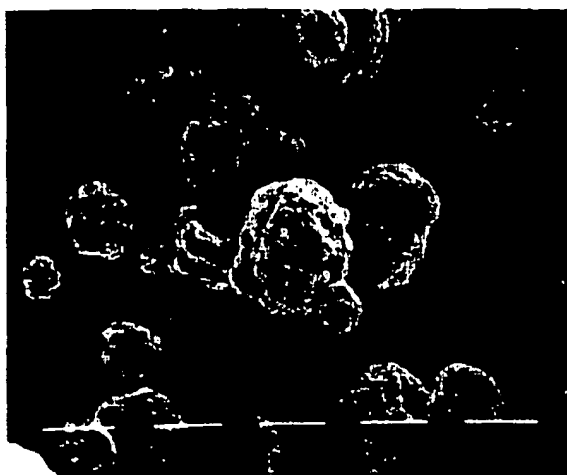

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP97/02803

A. CLASSIFICATION OF SUBJECT MATTER		
Int. Cl ⁶ C01G53/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Int. Cl ⁶ C01G53/00, C01G53/04		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Jitsuyo Shinan Koho 1926 - 1997 Jitsuyo Shinan Toroku Kokai Jitsuyo Shinan Koho 1971 - 1997 Koho 1996 - 1997 Toroku Jitsuyo Shinan Koho 1994 - 1997		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP, 8-37007, A (Tosoh Corp.), February 6, 1996 (06. 02. 96), Claim (Family: none)	1 - 14
Y	JP, 8-130013, A (Fuji Chemical Industry Co., Ltd.), May 21, 1996 (21. 05. 96), Claim & EP, 646546, A1 & WO, 94/22767 & US, 5648057, A	1 - 14
Y	JP, 6-342657, A (Her Majesty the Queen in right of the Province of British Columbia as represented by the Minister of Finance and Corporate Rerations), December 13, 1994 (13. 12. 94), Claim & EP, 702421, A1 & US, 5180574, A & EP, 554649, A1 & EP, 468942, A2 & US, 5264201, A	1 - 14
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search		Date of mailing of the international search report
November 4, 1997 (04. 11. 97)		November 18, 1997 (18. 11. 97)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP97/02803

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PY	JP, 8-213052, A (Seiko Instruments Inc.), August 20, 1996 (20. 08. 96), Claim & EP, 696075, A2 & US, 5620812, A	1 - 14
PY	JP, 8-217452, A (Tosoh Corp.), August 27, 1996 (27. 08. 96), Claim (Family: none)	1 - 14
PY	JP, 8-319120, A (The Nippon Chemical Industrial Co., Ltd.), December 3, 1996 (03. 12. 96), Claim (Family: none)	1 - 14
Y	JP, 8-55624, A (TDK Corp.), February 27, 1996 (27. 02. 96), Claim & EP, 672622, A1 & US, 5503930, A	1 - 14
PY	JP, 8-298115, A (Japan Storage Battery Co., Ltd.), November 12, 1996 (12. 11. 96), Claim & FR, 2733632, A1 & DE, 19615800, A1	1 - 14

Form PCT/ISA/210 (continuation of second sheet) (July 1992)